


*** UNCONTROLLED DOCUMENT * FOR REFERENCE ONLY**

STEWARD

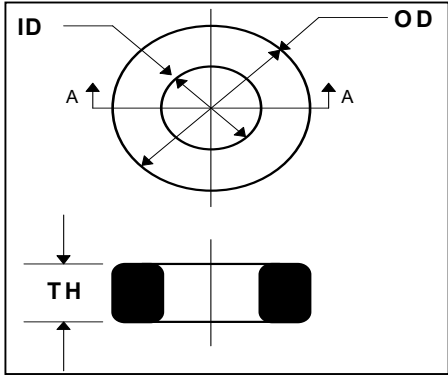

CORE DIMENSIONS				
UNCOATED CORE		35T1417-100		
	MM	INCHES		
OD	36.00	(1.417)	± .51	(.020)
ID	23.00	(.906)	± .51	(.020)
TH	15.00	(.591)	± .25	(.010)
EPOXY COATING		35T1417-10H		
OD	37.27	(1.467)	±	max
ID	21.73	(.856)	±	min
TH	16.02	(.631)	±	max

WEIGHT / K

43.9992 KGS

97.0000 LBS

INITIAL PERMEABILITY

5000

ELECTRICAL SPECIFICATIONS								
	MIN (μ H)	MIN TOL.	NOM (μ H)	MAX (μ H)	MAX TOL.	FREQ. (kHz)	VOLT. (V)	TURNS
L1	5.394	(-20%)	6.743	8.092	+20%	100	≤ .0426	1
L2	539.4	(-20%)	674.3	809.2	+20%	100	≤ .4258	10
Q	10	-	-	-	-	100	≤ .0426	1

COATING SPECIFICATIONS					
	TYPE	Max. Coating Thickness (mm)	Min. DLB VAC	Min. DLB VDC	TEST FORCE (LB)
35T1417-100	UNCOATED	-	-	-	-
35T1417-10H	EPOXY	0.76	1000	1333	9.34

NOTES

Steward

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Date:	01/05/2006	DWG #:	35T1417-10H-F	Title:		REV:	
Drawn By:	JRK			35T1417-10H		F	

REV	Description	ECN #	Date	INT
F	Chg coating description from Poly to Epoxy Add Kgs to weight		01/05/06	JRK