


ELECTRICAL


Contact Type: Form A  
 Contact Rating: 5 W Max.  
 Voltage, Switching: 150 V DC Max.  
 Voltage, Breakdown: 230 V DC Min.  
 Current, Switching: .35 A Max.  
 Current, Carry: .50 A Max.  
 Contact Resistance, Initial: .550 Ohm Max.

PHYSICAL

Capsule: Black Polypropylene  
 Encapsulant: Black Epoxy  
 Leads: 30 AWG PTFE MIL-W-16878/6, Black  
 Actuator: 57020-000  
 Actuate Distance: .175" [4.45] MIN.  
 Deactuate Distance: .290" [7.37] MAX.

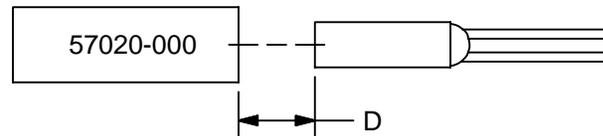

IDENTIFICATION

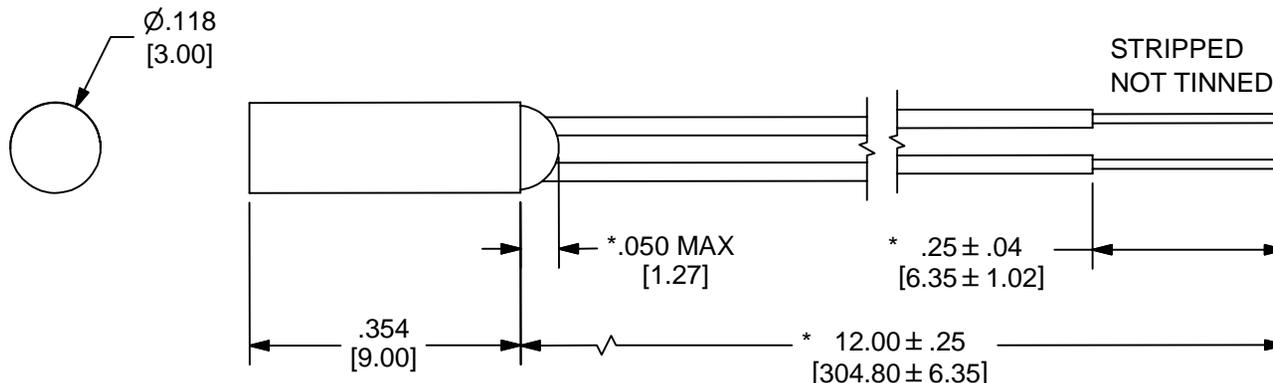

59010-010  
XXXX

4 DIGIT DATE CODE

Dimensions are in Inches [mm]  
 Tolerances unless otherwise noted:  
 .X: ± .1 , .XX: ± .01 , .XXX: ± .005 , Angular: ± 1/2°  
 \* Denotes Critical Dimensions

ORIGINAL DCR NO. L1767	
DRAWN BY: PS	DATE: 31-AUG-06
APP'D BY: PS	DATE: 24-Oct-06

<b>HAMLIN</b>	PROPRIETARY NOTE: THE INFORMATION ON THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF HAMLIN. THIS DRAWING MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED IN WRITING BY HAMLIN. THIS DRAWING IS SUBJECT TO RETURN UPON DEMAND.
	DESCRIPTION OF REVISION: ACTIVATION AND CR LIMITS ADDED, MAX REMOVED FROM .118" DIMENSION

SHEET: 1 of 1	DCR NO. L3040	REV. AB
DRAWN BY: PS	DATE: 20-MAR-07	
APP'D BY: PS	DATE: 26-Mar-07	