


1/4" x 1 1/4" Time-Delay Ceramic Tube Fuses

MDA Series



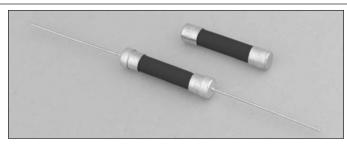

Description

- Time-delay
- Optional axial leads available
- 1/4" x 1-1/4" (6.35 x 31.75mm) physical size
- Ceramic tube, nickel-plated brass endcap construction
- UL Listed product meets standard 248-14

Electrical Characteristics				
Rated Current	Amp Rating	Opening Time		
	100%	None		
1/4 - 30A	135%	60 Minutes Max.		
	200%	120 Seconds Max.		

Agency Information


- UL Listed Card: MDA ²/₁₀ 20A (Guide JDYX, File E19180)
- UL Recognized Card: MDA 25 30A (Guide JDYX2, File E19180)
- CSA Certification Card: MDA ²/₁₀ 20 (Class No. 1422-01)
- CSA Component Acceptance: MDA 25-30A (Class No. 1422-30)

Environmental Data

- Shock: 1/100A and 8/10A MIL-STD-202, Method 213, Test Condition I; 1A thru 30A – MIL-STD-202, Method 213, Test Condition J
- Vibration: 1/100A and 8/10A MIL-STD-202, Method 201; 1/4A thru 30A – MIL-STD-202, Method 204, Test Condition C (Except 5q, 500Hz)

Dimensions - mm (in)

Drawing Not to Scale

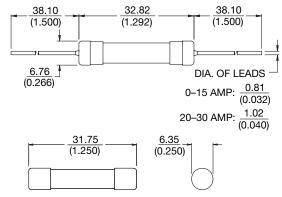

Ordering

• Specify packaging, product and option code.

Specifications								
			AC Inte	rrupting				
Part	Voltage Rating		Rating* (amps)		DC Interrupting	Typical DC Cold	Typical	Typical Voltage
Number	Vac	Vdc	250V	125V	Rating (amps) 125V	Resistance** (Ω)	Melting I2t† AC	Drop‡
MDA-1/4-R	250	-	35	10000	-	8.7	0.748	4.00
MDA-1/2-R	250	-	35	10000	-	1.78	2.53	1.42
MDA-3/4-R	250	-	35	10000	-	0.82	8.58	1.31
MDA-1-R	250	-	35	10000	-	0.56	12.21	1.03
MDA-1-1/2-R	250	-	100	10000	-	0.2565	27.5	0.691
MDA-2-R	250		100	10000	-	0.17	70.4	0.623
MDA-2-1/2-R	250		200	10000	-	0.068	31.79	0.213
MDA-3-R	250		200	10000	-	0.0525	44.99	0.182
MDA-4-R	250		200	10000	-	0.03575	147.4	0.162
MDA-5-R	250		200	10000	-	0.0256	380.49	0.145
MDA-6-R	250		200	10000	-	0.02035	587.73	0.141
MDA-7-R	250		200	10000	-	0.0165	638.33	0.137
MDA-8-R	250		200	10000	-	0.013	1038.4	0.134
MDA-10-R	250		200	10000	-	0.00925	1620.43	0.135
MDA-12-R	250	-	750	10000	-	0.00755	125.18	0.128
MDA-15-R	250	-	750	10000	-	0.00565	336.82	0.107
MDA-20-R	250	125	1500	10000	10000	0.004065	483.45	0.095
MDA-25A-R	250	125	1500	10000	10000	0.0031	734.69	0.105
MDA-30A-R	250	125	1500	10000	10000	0.002465	1096.7	0.110

^{*} Interrupting Ratings (Measured at 70% - 80% power factor on AC. The interrupting ratings for 25A, 30A were measured at 90% - 100% power factor on AC)

0711 BU-SB11875 Page 1 of 2 Data Sheet 2002 **COOPER Bussmann**


^{**} DC Cold Resistance (Measured at ≤10% of rated current)

[†] Typical Melting I²t (A²Sec) (I²t was measured at listed interrupting rating and rated voltage)

[‡] Typical Voltage Drop (Voltage drop was measured at 25°C ambient temperature at rated current)



Time-Current Curves

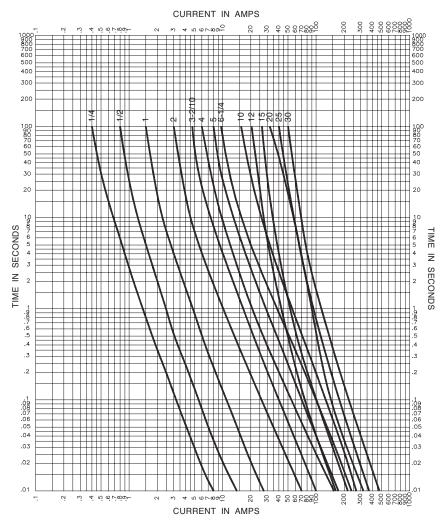

Packaging Code				
Packaging Code Prefix	Description			
BK-	100 fuses packed into a cardboard carton			
BK1-	1,000 fuses packed into a cardboard carton			
BK8-	8,000 fuses packed into a cardboard carton			

Option Code		
Option Code	Description	
В	Sealed to withstand aqueous cleaning (Board Washable)	
V	Axial leads - copper tinned wire with nickel plated brass overcaps	

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2011 Cooper Bussmann www.cooperbussmann.com









0711 BU-SB11875 Page 2 of 2 Data Sheet 2002