

Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-133



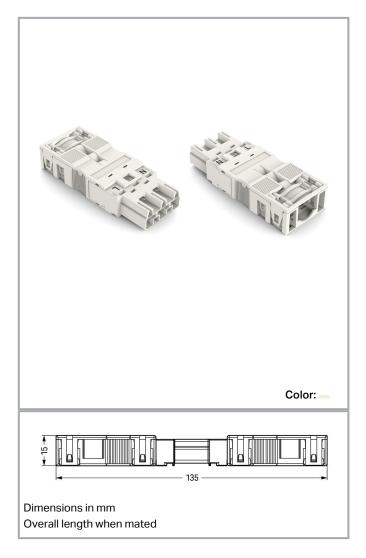

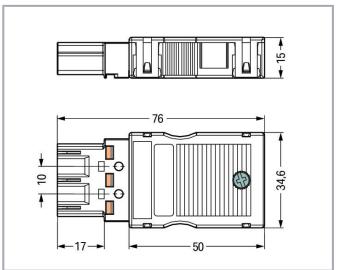

# Item description

# Male connector/plug WINSTA® MIDI with protection against mismating

The WINSTA® MIDI male connector/plug 3-pole is the pluggable solution for your use in control cabinets, for lighting connections or on PCBs. The pluggable installation connectors with spring pressure connection technology work entirely without screw connections. They allow resource-

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133



efficient, error-free installation in numerous applications. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with energised contact elements. General mains applications for almost any domain of use can be realised with WINSTA® MIDI pluggable installation connectors with A coding. Important parameters in the selection of a pluggable installation connector are the rated current and voltage: They tell us about the product's domains of use. This product has a current rating of 25 A – therefore it is also suitable for powerful loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Due to the built-in test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and expense. The strip length is 55 mm.

# WINSTA® MIDI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Now you can also cut installation expenses without compromising safety and quality: The WINSTA® MIDI pluggable installation connector with protection against mismating reduces the need for servicing and prevents unnecessary downtime.

- protection against mismating eliminates errors
- pre-assembled versions
- for any mains application
- exact dimensions
- quick replacement of defective units during ongoing operation

# Data Electrical data

# Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	25 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

# Ratings per UL 1977

Rated voltage (UL 1977)	600 V
	information, please contact your local sales office.
	currents below 16 A and voltages up to 600 V. For further
	accordance with the UL certificate in select applications with
Note for the US market	Some versions may also be used for current interruption in

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-133



# General

Note on contact resistance approx. 1 m $\Omega$  of contact resistance approx. 0.25 m $\Omega$  contact transition plug/socket

# Connection data

Connection points	6
Total number of potentials	3
PE function	Preceding PE contact

# Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
	Push-in
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.5 4 mm <sup>2</sup> / 20 12 AWG
Solid conductor; push-in termination	1.5 4 mm² / 16 12 AWG
Stranded conductor	0.5 2.5 mm² / 20 14 AWG
Fine-stranded conductor	0.5 4 mm² / 20 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 1.5 mm² / 20 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm² / 20 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	3
Conductor entry direction to mating direction	0°
Strip length (outer insulation)	55 mm

# Physical data

Pin spacing	10 mm / 0.394 inches
Width	34.6 mm / 1.362 inches
Height	15 mm / 0.591 inches
Depth	76 mm / 2.992 inches

# **Mechanical Data**

Application	General mains applications

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-133



A	
Yes	
N   ↓ L	
N	
approx. 20 70 N (depending on pole number)	
Locked: > 80 N	
Unlocked: approx. 20 70 N (depending on pole number)	
200, without resistive load	
IP20; When mated and secured with a strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)	

# Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Strain relief	strain relief housing

## **Material Data**

Note	(mate	rial	data)

Information on material specifications can be found here

Color	white	
Cover color	gray	
Material group	I	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-133



Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.469 MJ
Strain relief color	white
Weight	20 g

# **Environmental requirements**

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

# Commercial data

Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 8.0	EC002560
ETIM 7.0	EC002560
PU (SPU)	25 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918254120
Customs tariff number	85366990990

# **Environmental Product Compliance**

RoHS Compliance Status Compliant, No Exemption

# Approvals / Certificates

# General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	IEC 61535	NL -84761
KEMA	CCA DEKRA Certification B.V.	EN 61535	71- 123228

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-133





**cURus**Underwriters Laboratories Inc.

UL 1977

E45171



**VDE**VDE Prüf- und Zertifizierungsinstitut

EN 61535 40029808



**VDE**VDE Prüf- und Zertifizierungsinstitut

EN 61984 40002889

# Declarations of conformity and manufacturer's declarations

Logo Approval Additional Approval Text name

EU-Declaration of Conformity WAGO GmbH & Co. KG

Certificate name

Additional Approval Text name

# Approvals for marine applications

Logo	Approval	Additional Approval Text	name
ABS.	ABS American Bureau of Shipping	-	19- HG1868589- PDA
DNV DNV.COM/AF	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
IN IN	<b>LR</b> Lloyds Register	IEC 61984	LR22429487TA

# Counterpart



Item no.770-123
Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; white

www.wago.com/770-

Certificate

123

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133





Item no.770-223/035-050

Socket; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; white

www.wago.com/770-223/035-050



Item no.770-223

Socket; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-

223



Item no.770-6223

Linect® T-connector; 3-pole; Cod. A; 1 input; 2 outputs; white

www.wago.com/770-

6223



Item no.770-656

T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; white

www.wago.com/770-

656



Item no.770-657

3-way distribution connector; 3-pole; Cod. A; 1 input; 3 outputs; white

www.wago.com/770-

657



Item no.770-658

5-way distribution connector; 3-pole; Cod. A; 1 input; 5 outputs; white

www.wago.com/770-

658



Item no.770-661

Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 2 outputs; with cable connection on the input side; white

www.wago.com/770-

661



Item no.770-683

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on both sides; 2 locking levers; white

www.wago.com/770-

683



Item no.770-665

T-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; white

www.wago.com/770-

665



Item no.770-684

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; white

www.wago.com/770-

684



Item no.770-685

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on both sides; 3 locking levers; for flying leads; white

www.wago.com/770-

685



Item no.770-686

h-distribution connector; 3-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; white

www.wago.com/770-

686

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133





#### Item no.770-687

Distribution connector for switches; Single-pole switch and series circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; white

www.wago.com/770-687



## Item no.770-688

Distribution connector for switches; Single-pole and throttle two-way circuit; 3-pole; Cod. A/S; 1 input; 5 outputs; white

www.wago.com/770-688



# Item no.770-690

Three-phase to single-phase distribution connector; with phase selection; 5-pole/3-pole; Cod. A; 1 input; 5 outputs; white

www.wago.com/770-



#### Item no.770-723

Snap-in socket; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-



# Item no.770-723/009-000

Snap-in socket; with protruding mating face; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; white

www.wago.com/770-723/009-000

723



#### Item no.770-823

Socket for PCBs; straight; 3-pole; Cod. A; white

www.wago.com/770-823



#### Item no.770-823/011-000

Socket for PCBs; angled; 3-pole; Cod. A; white

www.wago.com/770-823/011-000

# Required accessories

# Locking levers

Locking system



# Item no.: 770-121

Locking lever; for flying leads; for manual operation; white

www.wago.com/770-121



#### Item no.: 770-131

Locking lever; for flying leads; for tool operation; white

www.wago.com/770-131



# Item no.: 770-101

Locking lever; for flying leads; for manual operation; black

www.wago.com/770-101



# Item no.: 770-111

Locking lever; for flying leads; for tool operation; black

www.wago.com/770-111

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133



# Optional accessories

_	

Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719



Item no.: 770-383

Operating tool; 3-way; green

www.wago.com/770-383

Cover

Cover



Item no.: 770-360

Lockout cap; for plugs; 5-pole; separable; yellow

www.wago.com/770-360

Coding

Coding



Item no.: 770-401

Coding pin; for plugs; Plastic; gray

www.wago.com/770-401

Marking accessories

Marker



Item no.: 770-450/000-002 Marker card; Plastic; yellow

www.wago.com/770-450

/000-002



Item no.: 770-450/000-001 Marker card; Plastic; green

www.wago.com/770-450

/000-001



Item no.: 770-450/000-005 Marker card; Plastic; red

www.wago.com/770-450

/000-005



Item no.: 770-450 Marker card; Plastic; white

www.wago.com/770-450



Item no.: 770-450/000-006 Marker card; Plastic; blue

www.wago.com/770-450 /000-006

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133



www.wago.com/770-450 /000-012



Item no.: 770-450/000-012 Marker card; Plastic; orange

# Downloads Documentation

#### **Bid Text**

770-133 X81 - Datei	2019 Feb 19	xml 3.1 kB	Download
770-133 doc - Datei	2015 Jun 8	doc 24.1 kB	Download

# CAD/CAE-Data

# CAD data

2D/3D Models 770-133	URL	Download
CAE data		
WSCAD Universe 770-133	URL	Download
ZUKEN Portal 770-133	URL	Download
EPLAN Data Portal 770-133	URL	Download

# **Environmental Product Compliance**

# Compliance Search

Environmental Product Compliance 770-133	URL	Download
Plug; with strain relief housing; 3-pole; Cod. A; 4,00 mm²; white		

# **Installation Notes**

Conductor termination


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com


www.wago.com/770-133







- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

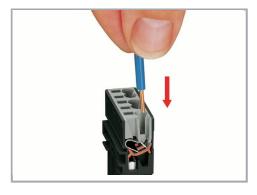





To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

## Conductor removal


 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133



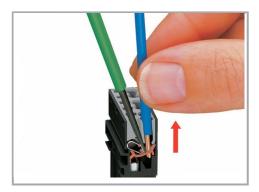


To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.

# Coding




Simply cut off the coding pin from the socket.

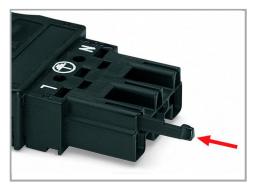

Insert coding pin into plug (break first) until it engages.

# Shield termination



Connector with shield termination

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 


WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-133







Apply the shield to the sheathed cable.

Strip length, outer insulation = 55 mm

Shield length = 10 mm

Push the shield connecting plate into the connector until fully inserted.



First insert the wired connector into a strain relief housing, then snap cover and tighten screw.

# **Product family**

WINSTA® MIDI
Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$